


DPG10 PowerChoke Tester

D.U.T.: PFC choke
 Inspector: ed-k
 Date: 10.11.2015
 Resistance [Ohm]: 0,0423

Max. current [A]: 90
 Meas. voltage [V]: 100
 Pulse time [μs]: 1000 (453)

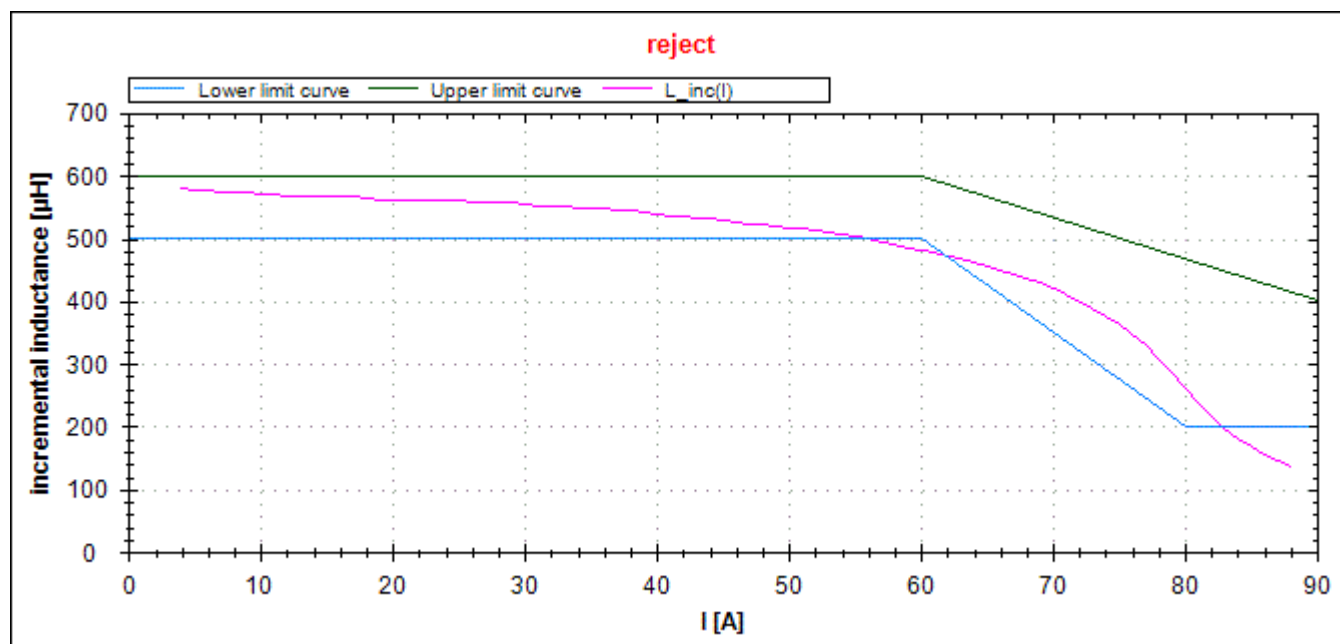

I [A]	L_{inc} [μH]	I [A]	L_{inc} [μH]	I [A]	L_{inc} [μH]	I [A]	L_{inc} [μH]	I [A]	L_{inc} [μH]
		21	561	41	536	61	477	81	238
		22	561	42	534	62	473	82	217
		23	561	43	533	63	468	83	198
4	579	24	561	44	533	64	463	84	182
5	577	25	560	45	530	65	456	85	168
6	576	26	559	46	527	66	450	86	155
7	575	27	558	47	524	67	443	87	145
8	574	28	558	48	521	68	436	88	136
9	573	29	556	49	519	69	429		
10	570	30	554	50	517	70	420		
11	569	31	552	51	515	71	410		
12	568	32	551	52	512	72	399		
13	568	33	550	53	509	73	387		
14	568	34	549	54	507	74	375		
15	568	35	548	55	503	75	362		
16	567	36	547	56	500	76	347		
17	566	37	546	57	494	77	329		
18	565	38	544	58	489	78	309		
19	562	39	542	59	485	79	286		
20	561	40	539	60	481	80	262		

Remarks: